




NAME: LED Canopy Light

P/N: CL-CP-150W-231X-1601 150W

**Advantage:**

- UL cUL DLC certificate
- High CRI
- IP65 driver, Input voltage 100-277Vac
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, Long lifespan
- Light is soft and uniform, Safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

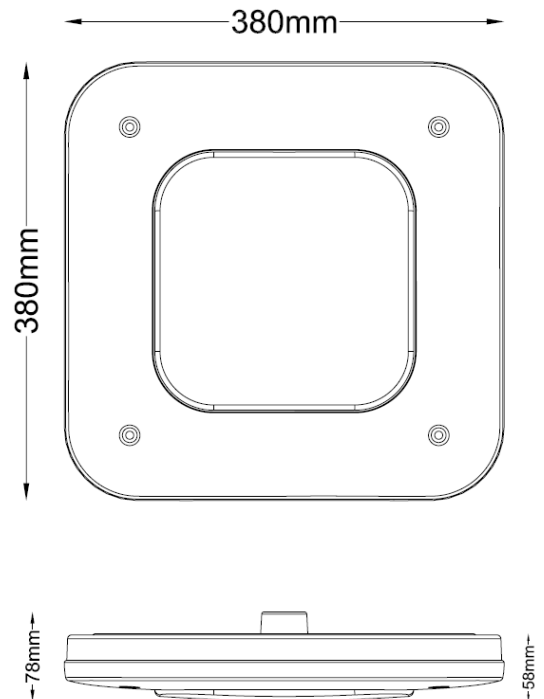

Dimension	380 x 380 x 78mm

## Technical Characteristic

Color temperature	5700K
CRI	>80
Lumen	15000-15600 LM
Input Power	150W
Viewing Angle	110°
Input Voltage	100-277Vac 50/60Hz
Driver model	China Brand Driver
PF	>0.9
Waterproof Rating	WET (IP65)

## Materials

LED Type	2835 (0.5W)
LED QTY	420 PCS
Housing	Aluminum
Housing color	White
Cover	Beaded lens

## Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Outdoor / Indoor
Safety Certification	UL、cUL、DLC
Warranty Time	5 Years

## Light Distribution Testing Parameters

### Luminaire Property

Luminaire Manufacturer:

Voltage: 120 V

Power: 145.50 W

Current: 1.2210 A

Power Factor: 0.993

### Photometric Results

IES Classification: Type II

Total Rated Lamp Lumens: 14866.5 lm

Efficiency: 100%

Upward Ratio: 0%

Central Intensity: 5137.18 cd

Pos of Max. Intensity: H202.5 V2

Longitudinal Classification: Very Short


Measurement Flux: 14866.5 lm

Downward Ratio: 100%

Luminaire Efficacy Rating (LER): 102.18

Max. Intensity: 5147.31 cd

Luminous Intensity Distribution Curve

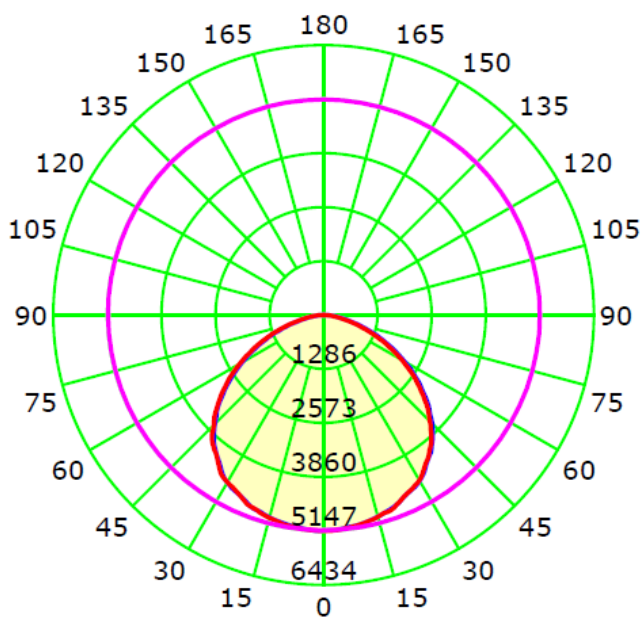

The Average Illuminance Effective Figure

