





NAME: LED MINI Wall Pack Light

P/N :CL-MWP03-15WBFA1-15W

Advantage:

- UL CUL DLC certificate
- Internal driver,
Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.

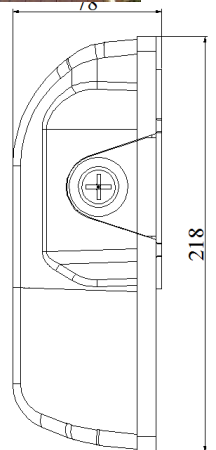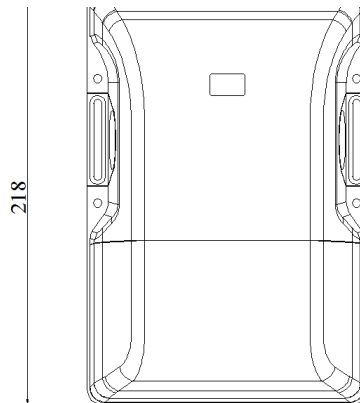

Dimension	218*147*78 mm

Technical Characteristic

Color temperature	5700K
CRI	>80
Lumen	1870-2030LM
Lumen Efficacy	125-135lm/W
Input Power	15W
Viewing Angle	100°
Input Voltage	100-277VAC 50/60Hz
Driver model	China Brand Driver
PF	>0.9

Materials



LED Brand	lumileds
LED Type	SMD2835 (0.5W)
LED QTY	40PCS
Housing	Aluminum
Housing color	Black/Brown/White/Customized
Optional Accessory	Photocell (Option)

Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL CUL DLC
Warranty Time	5 Years

Light Distribution Testing Parameters

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.39 lm/W			
MODEL		I _{max} (cd)	801.5	S/MH (C0/180)	1.11
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.65
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1931.1	η UP, DN (C0-180)	8.1, 65.2
NOMINAL FLUX (lm)	1931.14	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.6, 25.1
LAMPS INSIDE	1	η up (%)	9.7	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	120.0	η down (%)	90.3	CIBSE SHR MAX	1.10

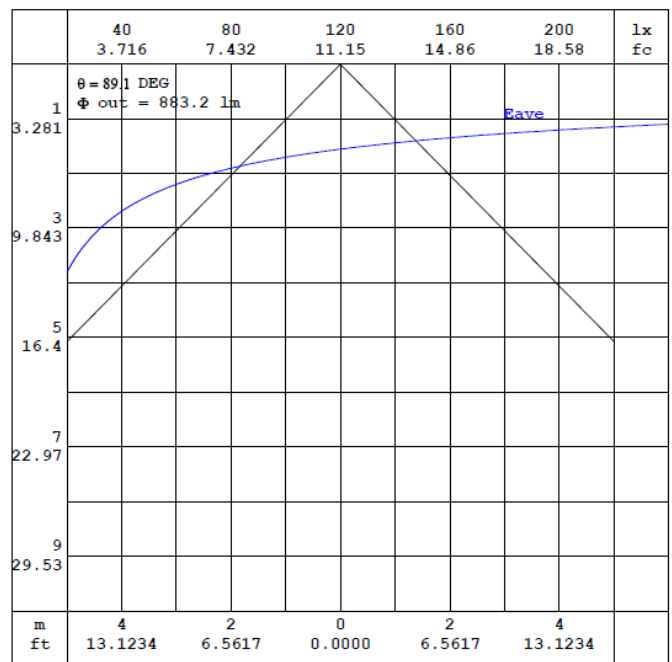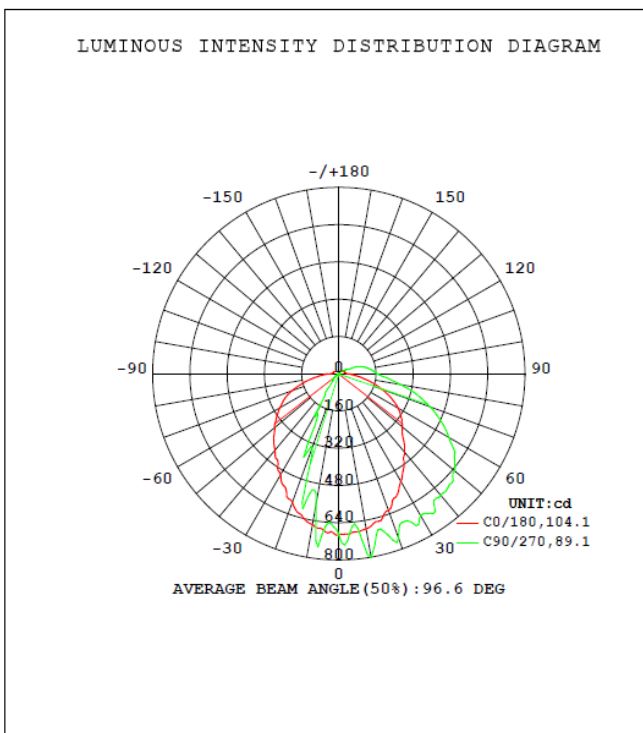

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Package

Lamps Net Weight: 0.9kg / pcs

